

SEACOMAIR High Pressure Compressors



Specifications Portable SCA100 Electric - SCA100 Gas - SCA100 Electric & Gas Compact



SCA100GH/55



SCA100GH/55 Compact

Construction: Air cooled, four stage, four cylinder hp compressor all stainless steel interstage and final stage coolers
Priority/Back pressure maintaining valve
Final pressure relief valve
Filling hose with On/Off valve and bleed with SCUBA INT yoke, DIN200 or DIN300

Max Pressure: 220bar/3200psi or 300bar/4350psi (option)
 Approx. Output: SCA80: 80 l/min. / 3.4 scfm charging rate*
 SCA100: 100 l/min. / 4.2 scfm charging rate*

Oil Capacity: 0,3 l (11 oz) synthetic compressor oil ISO VG190

Drive Motors: 5.5hp Honda® Gasoline engine
 220/400/440V/50Hz or 60Hz electric motor with 1 or 3 Phase

Fact.Options: SCA80E21/3W Filling panel with one outlet for 300bar/4400psi Airgun Cartridges

Weight: SCA100E: 38 kg (85 lbs)
 SCA100GH/55: 38 Kg (85 lbs)
 SCA100E: 43 kg (95 lbs)
 SCA80Walther: 45 kg (99 lbs)

Dimensions: L 30" (75) x D 14" (35) x H 15" (38 cm)



SCA100E43/4



SCA80E21/3W 300 bar

Model	Description	Charging Rate*	Drive Motor
SCA80E21/3	Compressor 80 l/min	80 l/min/ 3,4 scfm/ 4,8 m³/h	2,2kW el. 110/230V/50-60Hz 1Ph
SCA80E21/3W	Compressor 80 l/min	80 l/min/ 3,4 scfm/ 4,8 m³/h	2,2kW el. 230V/50-60Hz 1Ph
SCA100E21/4	Compressor 100 l/min	100 l/min/ 4,2 scfm/ 6 m³/h	3,0kW electric 230V/50-60Hz 1Ph
SCA100E23/4	Compressor 100 l/min	100 l/min/ 4,2 scfm/ 6 m³/h	3,0kW electric 230V/50-60Hz 3Ph
SCA100E43/4	Compressor 100 l/min	100 l/min/ 4,2 scfm/ 6 m³/h	3,0kW electric 400/440V/50-60Hz 3Ph
SCA100GH/55	Compressor 100 l/min	100 l/min/ 4,2 scfm/ 6 m³/h	4,0kW 5,5HP Honda Gas
SCA100E43/4 Compact	Compressor 100 l/min	100 l/min/ 4,2 scfm/ 6 m³/h	3,0kW electric 400/440V/50-60Hz 3Ph
SCA100GH/55 Compact	Compressor 100 l/min	100 l/min/ 4,2 scfm/ 6 m³/h	4,0kW 5,5HP Honda Gas

Specifications Open Frame SCA140-215-265 Electric - SCA265 Gasolin - SCA265 Diesel



SCA215E43/55OSS



SCA265DY/90SS

Construction: **Heavy Duty Stainless Steel Inox Frame**
 Continuous duty air cooled, three stage, three cylinder high pressure compressor all stainless steel interstage and final stage coolers
Pressure maintaining/Priority valve
Pressure relief valve on all stages

Max Pressure: 220bar/3200psi or 340bar/5000psi (option)
 Approx. Output: SCA140: 150 l/min/ 6,5 scfm charging rate*
 SCA215: 240 l/min/ 10 scfm charging rate*
 SCA265: 315 l/min/ 13 scfm charging rate*

Oil Type: 1,7 l (59 oz) synthetic compressor oil ISO VG150

Features: **Two (2) Filling hoses with SCUBA INT yoke, DIN200 or DIN300 On/Off Filling valve and bleed**

Drive motors: AC electric motors 220/400/440V/50Hz or 60Hz with 1 or 3 Phase
 9hp Subaru, 9hp Honda® Gas, 9hp Yanmar diesel

Weight: SCA140E21/4GRE: 279 lbs (127 kg)
 SCA215E43/55: 262 lbs (119 kg)
 SCA265E43/75: 262 lbs (119 kg)
 SCA265GH: 277 lbs (126 Kg)
 SCA265DY/9: 342 lbs (155 kg)

Dimensions: SCA215E: L 39" (100) x D 20" (50) x H 28" (71 cm)
 SCA265DK: L 48" (122) x D 25" (63) x H 30" (77 cm)



SCA140E21/4GRE



SCA265DK/10GRE

Model	Description	Charging Rate*	Drive Motor
SCA140E21/4OSS	Compressor 150 l/min	150 l/min/6,5 scfm/9,3 m³/h	3,0kW el. 110/230V/50-60Hz 1Ph
SCA140DY6/4OSS	Compressor 150 l/min	150 l/min/6,5 scfm/9,3 m³/h	6HP Yanmar Diesel Engine
SCA140E21/4GRE	Compressor 150 l/min	150 l/min/6,5 scfm/9,3 m³/h	3,0kW el. 110/230V/50-60Hz 1Ph
SCA215E43/55OSS	Compressor 240 l/min	240 l/min/10 scfm/14,5 m³/h	4,0kW el. 400/440V/50-60Hz 3Ph
SCA265E43/75OSS	Compressor 315 l/min	315 l/min/13 scfm/18 m³/h	5,5kW el. 400/440V/50-60Hz 3Ph
SCA265DK/10GRE	Compressor 290 l/min	290 l/min/ 12,4 scfm/17,4 m³/h	10HP Kohler/Lombardini Diesel
SCA265DY/9OSS	Compressor 315 l/min	315 l/min/13 scfm/18 m³/h	9HP Yanmar Diesel Engine

SeaComAir compressors meets all international breathing air standards for CGA Grade "E" Air & DIN EN12021

SeaComAir • Grenzhub 5a • 83229 Aschau • Germany
 Tel.+49-8057-904674 • info@seacomair.com

All pricing in EURO EX-Works. Price and Specification are subject to change without notice.

www.seacomair.com

ISO9001: 2015 Certified Factory

© SeaComAir 2022-02 SCA/VK

Specifications Compact Stainless Steel & Open Cabinet Frame SCA215-265 Electric - SCA265 Gas



SCA265E43/55CSS

Construction: **New Weight optimized Stainless Steel Frame with Lightweight Cover & Open Cabinet Steel Frame**
Option: Titanium Lightweight Frame
 Continuous duty air cooled, three stage, three cylinder high pressure compressor
 all stainless steel interstage and final stage coolers
Pressure maintaining/Priority valve
Pressure relief valve on all stages

Max Pressure: 220bar/3200psi or 340bar/5000psi (option)
 Approx. Output: SCA215: 240 l/min/ 10 scfm charging rate*
 SCA265: 315 l/min/ 13 scfm charging rate*

Lubrication: Splash lubrication with oil thrower pin
 Oil Type: 1,7 l (59 oz) synthetic compressor oil ISO VG150
 Features: **Two (2) Filling hoses with SCUBA INT yoke, DIN200 or DIN300 On/Off Filling valve and bleed**

Drive motors: AC electric motors 220/400/440V/50Hz or 60Hz with 1 or 3 Phase
 9hp Honda® Gas, 9hp Yanmar or Kohler diesel

Weight: SCA215E43/55: 264 lbs (120 kg)
 SCA265E43/75: 275 lbs (125 kg)

Dimensions: 40,5" (103) x 19" (49) x 26" (67 cm)
 LxDxH 44" (112) x 30" (63) x 28" (71 cm)



SCA265E43/75GRE

Model	Description	Charging Rate*	Drive Motor
SCA215E43/55CSS	Compressor 240 l/min	240 l/min/10 scfm/14,5 m³/h	4,0kW el. 400/440V/50-60Hz 3Ph
SCA265E43/75CSS	Compressor 315 l/min	315 l/min/13 scfm/18 m³/h	5,5kW el. 400/440V/50-60Hz 3Ph
SCA265E43/75GRE	Compressor 315 l/min	315 l/min/13 scfm/18 m³/h	5,5kW el. 400/440V/50-60Hz 3Ph
SCA265GH/9CSS	Compressor 315 l/min	315 l/min/13 scfm/18 m³/h	6,6kW 9HP Honda Gas

Specifications SCA265-300 Compact Cabinet - SCA300 Silent



SCA265E43/CFSF3

Construction: Continuous duty air cooled, three stage, three cylinder high pressure compressor
 Mounted on a free standing, shock mounted frame or powder coated steel cabinet
Compressor CFSAP: Additional Purification
Silent: Sound absorbing housing

Max Pressure: 220bar/3200psi or 340bar/5000psi (Option)
 Approx. Output: SCA300: 330 l/m / 14 scfm charging rate*
 Oil Capacity: **1,7 Liters (59 oz.) SCA synthetic oil ISO VG150**

Drive motors: AC electric motors 220/400/440V/50Hz or 60Hz with 1 or 3 Phase
 Noise level: SCA265 CFSF3: 82 dB (ISO3746)
 SCA300 Silent: 69,8 dB (ISO3746)

Features: **Automatic condensate drain**
Hour meter
Interstage pressure gauges and final gauge
Final pressure switch with automatic shut-off
Low oil shut down switch
Cabinet High Temperature shut down switch
Phase Control prohibit wrong rotation
Two (2) Filling hoses with SCUBA INT yoke, DIN200 or DIN300 On/Off Filling valve and bleed
SCA265E43/CFSAP Equipped with Three large capacity Oil/Moister Separators for hot and humid climates

Weight: SCA265 CFSF3: 341 lbs (155 Kg)
 SCA265 Silent: 490 lbs (222 Kg)

Dimensions: SCA265 CFSF3: L 35"(90) x D 24"(60) x H 33,5"(85cm)
 SCA265/300 Silent: L 35"(90)x D 34"(87)x H 52"(132 cm)



SCA265E43/CFSAP



SCA300E43/CFSAP



SCA300E43/Silent

Model	Description	Charging Rate*	Drive Motor
SCA265E43/CFSF3	Compressor 315 l/min	315 l/min/13 scfm/18 m³/h	5,5kW el. 400/440V/50-60Hz 3Ph
SCA265E43/CFSAP	Compressor 315 l/min	315 l/min/13 scfm/18 m³/h	5,5kW el. 400/440V/50-60Hz 3Ph
SCA300E43/CFSAP	Compressor 330 l/min	330 l/min/14 scfm/20 m³/h	7,5kW el. 400/440V/50-60Hz 3Ph
SCA265E43/Silent	Compressor 315 l/min	315 l/min/13 scfm/18 m³/h	5,5kW el. 400/440V/50-60Hz 3Ph
SCA300E43/Silent	Compressor 330 l/min	330 l/min/14 scfm/20 m³/h	7,5kW el. 400/440V/50-60Hz 3Ph

*Based on charging an 11 Liter / 80 Cu. Ft. Cylinder from 35 bar / 500 psi to 200 bar / 3000 psi.

SeaComAir 80 & 100 Portable Compressors are non-continuous duty compressors.

SeaComAir compressors meets all international breathing air standards for CGA Grade "E" Air & DIN EN12021

www.seacomair.com



Specifications Cabinet & Silent SCA650-750 & Heavy Duty SCA1400OF



SCA750E43/HDF-OP

Construction: Continuous duty air cooled, four stage, four cylinder high pressure compressor
Mounted on a free standing, shock mounted frame
Silent with Sound absorbing housing

Max Pressure: 220bar/3200psi or 330bar/4700psi
 440bar/6000psi (Option)

Approx. Output: SCA650HDF-SL: 650 l/m / 27 scfm charging rate*
 SCA1400OF: 14000 l/m / 49 scfm charging rate*

Oil Capacity: 4,5 Liters (158 oz.) or 9,2 Liters


Drive motors: AC electric motors 400/440V/50Hz or 60Hz with 1 or 3 Phase

Noise level: SCA650 HDF Silent: 70 dB (ISO3746)
 SCA1400OF: 90 dB

Features: **Main control panel with Hour meter**
Low oil level warning light with Auto shut-off
Phase controller prohibits reverse rotation
Fully automatic condensate drain
Final pressure switch with gauge and auto-stop
Temperature digital display with Auto shut-off
Pressure gauges installed after each stage

Weight: SCA650 HDF-Silent: 970 lbs (440 Kg)
 SCA1400OF: 1520 lbs (690 Kg)

Dimensions: HDF-SL: L 37" (94) x D 82" (132) x H 66" (169 cm)
 HDF-OP: L 37" (94) x D 52" (132) x H 66" (169 cm)
 1400OF: L 62" (157) x D 41" (105) x H 42,5" cm (108)

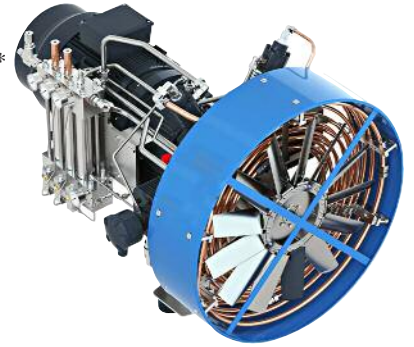

SCA1400E43/OF-350

Model	Description	Charging Rate*	Drive Motor
SCA650E43/HDF-SL	Compressor 650 l/min	650 l/min/27 scfm/39 m ³ /h	11kW el. 400/440V/50-60Hz 3Ph
SCA750E43/HDF-OP	Compressor 750 l/min	750 l/min/30,5 scfm/45 m ³ /h	15kW el. 400/440V/50-60Hz 3Ph
SCA1400E43/OF-350	Compressor OP 1400 l/min	1400 l/min/49 scfm/84 m ³ /h	37kW el. 400/440V/50-60Hz 3Ph

Specifications Booster Piston Compressor Air & Nitrogen



SCA350E43/CFSAP2B

High Pressure Booster Compressor. **Free Air delivery up to 360 l/min @ 8 bar Inlet Pressure. Maximum Pressure up to 400 bar. Compatibel with Air and Nitrogen.**

Construction: Continuous duty air cooled, two stage, two cylinder high pressure Booster
 Mounted on shock mounted frame, powder coated steel cabinet

Inlet Pressure: 2-8 bar / 29-116 psi

Max Pressure: 400bar/5800psi

Oil Capacity: 1,7 Liters (59 oz.)

Drive motors: AC electric motors 400/440V/50Hz or 60Hz, 3 Phase

Noise level: 81 dB

Features: Double Purification PED certified system with activated carbon and molecular sieve
 Automatic condensate drain system with collector, Hour meter
 Final pressure switch with gauge and automatic shut-off
 Final pressure safety relief valve
 Low oil shut down switch, Cabinet High temperature shut down switch
 Interstage Pressure Gauges (3 pcs)
 Inlet Pressure Switch w/automatic restart, Phase Controller

Weight: 163 kg (359 lbs)

Dimensions: L 108 (42") x D 72 (28") x H 91cm (36")

Model	Description	Free Air Delivery	Drive Motor
SCA350E43/CFSAP2B	Booster 360 l/min @ 8bar	360 l/min - 13 cfm - 21,6 m ³ /h	5,5kW el. 400/440V/50-60Hz 3Ph

Specifications Low Pressure 300 Nitrox Silent



Construction: Rotary Screw Low Pressure Compressor with Semi-Permeable Membrane
 Mounted in plastic coated steel cabinet
 Sound proofing system
 LP Filtration for Membrane
 Two Nitrox O₂ Analyzers
Operates on CGA Grade D Air

Working Pressure: 6-10 bar/90-145 psi

Capacity: 1000 l/min / 35 cfm @ 10 bar

Drive motors: 7.5 kW 230/400/440V/50 or 60Hz el. motor 3 phase

Features: **Final pressure gauge**
Emergency shut-off
Automatic Condensate Drain
High Pressure Automatic Shut Off
Temperature Automatic Shut Off

Noise: 71 dB (ISO3746)

Weight: 660 lbs (300 Kg)

Dimensions: L 59" (150) x D 30" (76) x H 48" (122 cm)



Model	Description	Capacity @ 10 bar**	Drive Motor
SCA300E43/EAN	Low Pressure Nitrox Generator	1000 l/min - 35 cfm	7,5kW 230/400/440V/50-60Hz 3Ph

Specifications Natural Gas SCA150-400-1000-2000 CNG Compressors

CNG Compressed Natural Gas Compressors

Construction: Continuous duty air cooled, three and four stage, three and four cylinder high pressure compressor
 Mounted in plastic coated steel cabinet, Sound proofing system
Meets all international Natural Gas standards ATEX 94/9/EC PED 97/23/EC, Machine 98/37/EC

Max Pressure: 220bar/3200psi or 300bar/4350psi
 Approx. Output: SCA150 CNG: 200 l/min / 7 cfm
 SCA400 CNG: 400 l/min / 14 cfm
 SCA1000 CNG: 1000 l/min / 36 cfm
 SCA2000 CNG: 2000 l/min / 74 cfm
 Oil Capacity: 1,7 Liters (59 oz.) 4,5 Liters (158 oz.) 9,5 Liters
 Drive motors: 220/400/440V/50Hz or 60Hz, 1 or 3 Phase
 Noise level: SCA150 CNG: 70 dB
 SCA400 CNG: 70 dB
 SCA1000-2000 CNG: 90 dB

Features 150-400: **Remote MECP Electric Control Panel**
Emergency OFF switch
Hour meter
Rotation control warning light
Final recharge pressure gauge
Filling hose with CNG filling nozzle

Weight: SCA150 CNG: 396 lbs (180 Kg)
 SCA400 CNG: 925 lbs (420 Kg)
 SCA2000 CNG: 1540 lbs (700 Kg)
 Dimensions: SCA150 CNG: L 27,5" (70) x D 26" (67) x H 41" (105 cm)
 SCA400 CNG: 32" (82) x 52" (133) x 70" (179 cm)
 SCA2000 CNG: 62" (159) x 40,5" (103) x 44" (111cm)



SCA150E43/CNG-SL



SCA400E43/CNG-SL



SCA2000E43/OF-CNG

Model	Description	Free Air Delivery F.A.D.	Drive Motor
SCA150E43/CNG-SL	CNG Natural Gas Comp. 200bar	200 l/min/7 cfm/12 m³/h	4kW el. 400/440V/50-60Hz 3Ph
SCA400E43/CNG-SL	CNG Natural Gas Comp. 200bar	400 l/min/14 cfm/24 m³/h	9kW el. 400/440V/50-60Hz 3Ph
SCA1000E43/OF-CNG	CNG Natural Gas Comp. 300bar	1000 l/min/36 cfm/62 m³/h	30kW el. 400/440V/50Hz 3Ph
SCA2000E43/OF-CNG	CNG Natural Gas Comp. 300bar	2000 l/min/74 cfm/125 m³/h	36W el. 400/440V/50Hz 3Ph

Specifications Containment Fill Station

CFS-2M Two Position high pressure Containment Fill Station

- Accommodate 2 SCBA or SCUBA Cylinders up to 12 Liter / 88 Cu. Ft.
- Fills two SCBA or SCUBA cylinders at a time
- Working Pressure up to 450 bar/6500 psi
- Dual fill pressure with High Pressure Regulator (option)
- Flow Restrictors thru needle valve to optimize air flow for accurate filling
- One Inlet Pressure Gauge to Monitor Inlet Pressure
- Two (2) Panel Valves to Control Fill Process
- Two (2) Fill Pressure Gauges to Monitor Fill Process
- Two (2) Fill Hoses with Bleed Valve and Fill Adapter
- One connection with Valve for Cascade system
- Safety Control Lock Door System manually
- Certified by a Licensed Engineering Testing Facility TUV Germany
- Dimensions L 30"(78) x D 21"(53) x H 59"(150 cm)
- Weight 350 Kg (770 lbs)



CFS-2MFD



CFS-2MSD

Model	Description	System	Outlets & Inlets
CFS-2MFD	Fill Station 2 Position Fall Door	2 x SCBA or SCUBA cylinders	1 Inlet & 2 Filling Connection
CFS-2MSD	Fill Station 2 Position Sliding Door	2 x SCBA or SCUBA cylinders	1 Inlet & 2 Filling Connection

Specifications Pneumatic Gas Booster Compressors System

- Double-Acting Gas Booster for compression of Industrial Gases
- Heavy Duty Stainless Steel Frame according Safety Regulations
- All Control Components located inside
- Inlet Safety Valve 10 bar / 145 psi
- Outlet Safety Valve 300 bar / 4350 psi
- Station with protective plate for maximum security
- System relief with Absorber
- Inlets with back pressure/non-return valves
- Available for Output Pressure 400, 500, 600, 700bar/10150psi



Model	Description	System Ration	Outlets & Inlets
GBS32/SSF	Booster Compressor Stainless Steel Frame	1 : 32	1 Inlet & 1 Filling Connection

Specifications High Pressure Air Storage Cylinder Racks



ASCR50-350

ASCR Air Storage Cylinder Racks


- High pressure, air storage system with one, two, three, four 50 liter 350bar/5000psi or 450bar/6500psi cylinders
- Construction Durable, powder coated steel cabinet Lightweight Steel Alloy
- Working Pressure 350bar/5000psi, 450bar/6500psi
- Test Pressure 525bar/7600psi, 675bar/9800psi
- Pressure Equipment Directive PED CE certified
- Seamless Steel Gas Cylinder according EN ISO 9809-2
- One connection G1/4"
- Water drain manually
- TÜV Certificate according EC Directive 97/23/EC regulations AD2000
- Modular system, available also in vertical 6, 8 or 9 pack



ASCR150-350



ASCR100-350



ASCR200-350


Available for Argon, Helium, Hydrogen, Methane, Nitrogen, Oxygen, Natural Gas (as option)

Model	Description	System	Options
ASCR50-350	Air Storage Cylinder Rack	1x50 Liter cylinder 350 bar	Inox Panel, Safety Valve, Manometer
ASCR100-350	Air Storage Cylinder Rack	2x50 Liter cylinder 350 bar	Inox Panel, Safety Valve, Manometer
ASCR150-350	Air Storage Cylinder Rack	3x50 Liter cylinder 350 bar	Inox Panel, Safety Valve, Manometer
ASCR200-350	Air Storage Cylinder Rack	3x50 Liter cylinder 350 bar	Inox Panel, Safety Valve, Manometer


Specifications High Pressure Air Storage Cylinder Lift Racks

ASCLR Air Storage Cylinder Lift Racks

- Four Point Lift Racks
- Construction Durable, steel frame
- High pressure, Breathing air storage system with 6,12,40 or more 50 liter or thirty (30) 80 liter cylinders
- Working Pressure 350bar/5000psi, 450bar/6500psi or 500bar/7250psi (as option)
- Test Pressure 525bar/7600psi, 675bar/9800psi, 750bar/10875psi
- Pressure Equipment Directive PED CE certified
- Seamless Steel Gas Cylinder according EN ISO 9809-2
- High Pressure INOX Panel with connection G1/4" or G3/8"
- Safety Pressure Valve
- Storage pressure gauge 0-450bar/6500ps
- TÜV Certificate according EC Directive 97/23/EC regulations AD2000

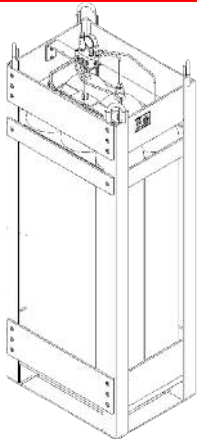


ASCLR300-350

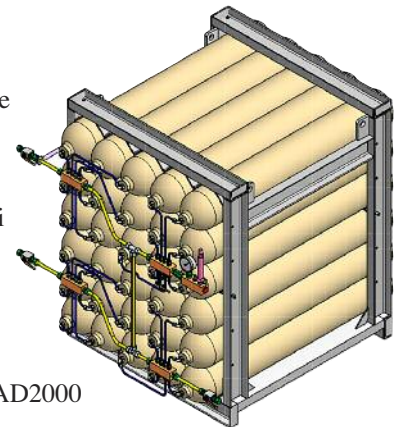


ASCLR2400-350


Applications for Argon, Helium, Hydrogen, Methane, Nitrogen, Oxygen, Natural Gas (as option)

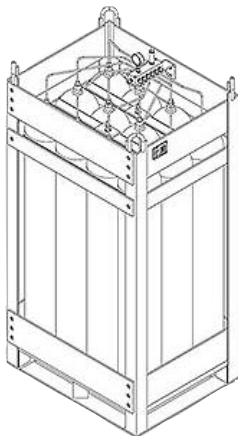

ASCLR600-350

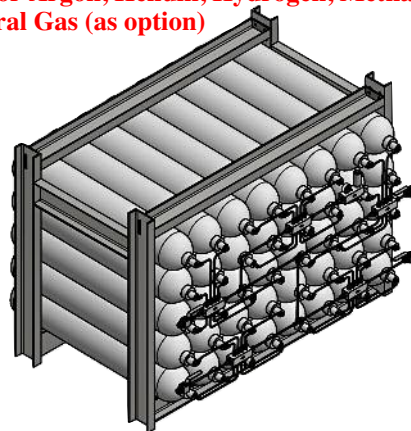

ASCLR2000-500

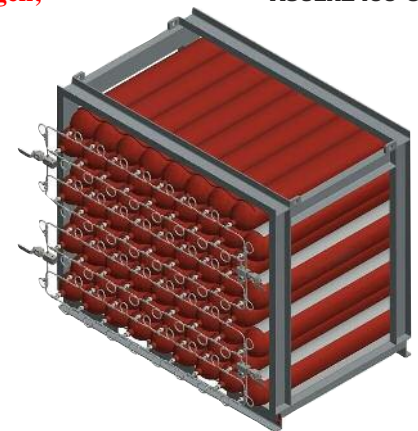

ASCLR3400-350

Model	Description	System	Options
ASCLR300-350	Air Storage Cylinder Lift Rack	6x50 Liter cylinder 350 bar	Inox Panel, Safety Valve, Manometer
ASCLR600-350	Air Storage Cylinder Lift Rack	12x50 Liter cylinder 350 bar	Inox Panel, Safety Valve, Manometer
ASCLR2000-500	Air Storage Cylinder Lift Rack	40x50 Liter cylinder 500 bar	Inox Panel, Safety Valve, Manometer
ASCLR2400-350	Air Storage Cylinder Lift Rack	30x80 Liter cylinder 350 bar	Inox Panel, Safety Valve, Manometer
ASCLR3400-350	Air Storage Cylinder Lift Rack	68x50 Liter cylinder 350 bar	Inox Panel, Safety Valve, Manometer

Specifications High Pressure Filling Panels

FP3/2SL filling panel

- 2x300bar/4400psi and 2x220bar/3200psi
- Inlet fitting 300bar for high pressure compressor
- Two (2) 400bar/5800psi pressure gauges
- Two 300bar/4400psi filling fittings with On/Off filling valves
- Two 220bar/3200psi filling fittings with On/Off filling valves
- Pressure reducer for simultaneous filling
- Weight: 20 kg (44 lbs)
- Dimensions: L 75 (29,5") x D 35 (14") x H 37 cm (14,5")

FP3/2SSC filling panel

- 2x300bar/4400psi and 2x220bar/3200psi
- Inlet fitting 300bar for high pressure compressor
- 300bar/4400psi pressure gauge
- 220bar/3200ps pressure gauge
- Two 300bar/4400psi filling fittings with On/Off filling valves
- Two 220bar/3200psi filling fittings with On/Off filling valves
- Pressure reducer for simultaneous filling
- Weight: 8 kg (17.5 lbs)
- Dimensions: L 63 (25") x D 16 (6.5") x H 20 cm (8")



FP3/2SL



FP3/2SSC

Model	Description	System	Options
FP3/2SSC	Filling Panel 300bar/200bar	Panel-System INOX	2x300bar/2x200bar, Level Valves, Hose
FP3/2SL	Filling Panel 300bar/200bar	Panel-System	2x300bar/2x200bar, Level Valves, Hose

Specifications Low Pressure Screw Compressors

- SCA-BSR Screw Compressor
- SCA-BDSR Compressor with AR Air Receiver 270 Liter
- SCA-ORPSR Compressor Capacity 5000 l/min @ 15 bar
- SCA-ORPDSR Compressor Capacity from 1900 up to 5000 l/min @ 15 bar
- Max. Pressure from 8 up to 15 bar / 116-218 psi
- Screw technology has longer service life
- Lower maintenance costs
- Effective oil-air cooler guarantees operational safety and excellent air quality
- Duty cycle are extremely higher then piston compressors
- Heavy Duty Steel Frame according Safety Regulations
- Lower noise level
- Intensive cooling combined with an effective aftercooler
- Pulsation-free compressed air
- Compressor stage cooling by oil injection
- Phase rotation controll as option
- Integrated oil control valve
- **Available with refrigeration Air Dryer as option**
- Available also with variable speed control as option
- Electronic Controll System with LCD Display as option
- SCA-BKSR1000-10 Dimensions L 103 x D 57 x H 72 cm
- Weight 225 Kg (495 lbs)
- SCA-FSR8000-15 Dimensions L 175 x D 110 x H 170 cm
- Weight 1440 Kg (3225 lbs)



SCA-BSR1000-10



SCA-ORPSR5000-15



SCA-BDSR1000-10-270



SCA-ORPDSR1900-15-250


Model	Description Compressor	Free Air Delivery F.A.D.	Drive Motor
SCA-BSR1000-10	Screw Low Pressure	270-1000 l/min -9,5-35 cfm	2,2-7,5kW 400V/50-60Hz 3Ph
SCA-BDSR1000-10-270	Screw with Air Receiver 90-270 L	270-1000 l/min - 9,5-35 cfm	2,2-7,5kW 400V/50-60Hz 3Ph
SCA-ORPSR5000-15	Screw Continues Duty Low Pressure	1900-5000 l/min - 67-176 cfm	18,5-45kW 400V/50-60Hz 3Ph
SCA-ORPDSR1900-15-250	Screw with Air Receiver 250 L	1900-5000 l/min - 67-176 cfm	18,5-45kW 400V/50-60Hz 3Ph

Specifications Low Pressure Piston Compressors



SCA-PH600-30

- SCA-PH600-30 Compressor 20 Bar
- SCA-PH1600-40 Compressor 40 Bar
- Max. Pressure from 20 to 40 bar / 290-580 psi
- Stationary Marine Type Belt or Direct driven
- Air cooled, Two stage, Two cylinder compressors, with Aluminum cooler
- Effective oil-air cooler guarantees operational safety
- Long service life of the valves
- Long Inspection intervals
- El Motor Energy efficiency IE3, Protection IP55, Class F
- Electronic Controll Panel
- SCA-PH600-30 Dimensions L 1040 x D 880 x H 810 cm
- Weight 390 Kg (858 lbs)
- SCA-PH1600-40 Dimensions L 750 x D 1280 x H 1000 cm
- Weight 485 Kg (1067 lbs)

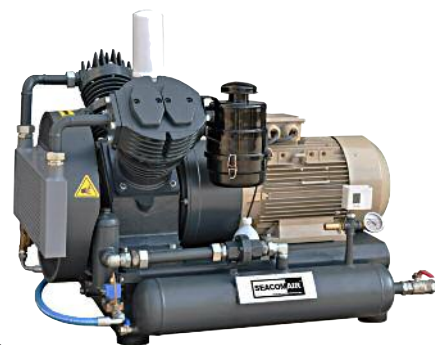

SCA-PH1600-40

Model	Description Compressor	Free Air Delivery F.A.D.	Drive Motor
SCA-PH600-30	Piston Low Pressure	600 l/min - 21 cfm	11kW 400V/50Hz 3Ph
SCA-PH1600-40	Piston Low Pressure	1600 l/min - 56 cfm	18,5kW 400V/50Hz 3Ph

Specifications Gas Analyzers CO, O2, Moisture



Carbon Monoxide CO

Carbon Monoxide CO Analyzer

- Sensor: Electrochemical
- Range: 0-100ppm Carbon Monoxide
- Operating Temperature: 41 to 104 °F (5 to 40 °C)
- Power: 9 Volt Standard Battery
- Weight: 250 g (8,8 oz)
- Dimensions: 3,5" (8,5) x 3" (7,5 cm)



Oxygen O2

Oxygen O2 Analyzer

- Sensor: Electrochemical
- Range: 0-100% O2
- Operating Temperature: 41 to 86 °F (5 to 30 °C)
- Power: 9 Volt Standard Battery
- Weight: 250 g (8,8 oz)
- Dimensions: 3,5" (8,5) x 3" (7,5 cm)



Moisture RH

Moisture Digital Analyzer

- Sensor: Capacitive Technology
- Range: 0-99,9% RH
- Power: 9 Volt Standard Battery
- Weight: 250 g (8,8 oz)
- Dimensions: 3,5" (8,5) x 3" (7,5 cm)

Model	Description
CMA-DO	Carbon Monoxide CO Digital
OA-DO	Oxygen O2 Digital
MA-DO	Moisture RH Digital

Compressor Factory Options

Model	Description	Compressor
MP440	Compressor Model 400bar/5800psi pressure	SCA650/HDF-SL
BZTT100	Hour meter Digital (Gas models only)	SCA100/215/265GH
HMAE100	Hour meter Analog (Electric models only)	SCA100/215/265E
ASP100	Auto Stop/Shut off pressure switch	SCA100/140/215/265
PAC300/100	Pressure Adapter 300-200bar (4300/3000psi) with MP330 only	SCA80/100/140/215/265
PG2010	Interstage Pressure Gauges (3 pcs)	SCA Cabinet
LO2015	Low oil shut down switch	SCA Cabinet
ACD100	Automatic condensate drain	SCA80/100/140/215/265
WS200/2	Wheel Set (2 each)	SCA215/265
MB12	12V Motor Battery for Electric Start (Gas & Diesel engines)	SCA140/215/265
MES100	Electric Start for Gas & Diesel engines with MB12 only	SCA140/215/265
PCSD200	Purity Controll Signalling Device for filter cartridge saturation	SCA265/300CFSAP/650/750HDF
AD500	Final High Pressure Air Dryer	SCA650/750HDF
ECTS596	Electrical Control Touch Screen Main Display	SCA650/750HDF

SeaComAir compressors meets all international breathing air standards for CGA Grade "E" Air & DIN EN12021

SeaComAir • Grenzhub 5a • 83229 Aschau • Germany
 Tel.+49-8057-904674 • info@seacomair.com

All pricing in EURO EX-Works. Price and Specification are subject to change without notice.

ISO9001: 2015
Certified Factory